

# G3VM-□CR□/□FR□

MOS FET Relays DIP 8-pin, High-Current and Low-ON-resistance Type

DIP

G3VM-□CR□/□FR□

## The highest class load current of MOS FET Relays realized with DIP8 package

- Contact form: 1a (SPST-NO)
- Load voltage: 60 V, 100 V, 200 V, 400 V, or 600 V
- 60-V Relay: Continuous load current of 5 A (10 A) max. \*
- 100-V Relay: Continuous load current of 3 A (6 A) max. \*
- 200-V Relay: Continuous load current of 1.5 A (3 A) max. \*
- 400-V Relay: Continuous load current of 0.4 A (0.8 A) max. \*
- 600-V Relay: Continuous load current of 0.6 A (1.2 A) max. \*

\* Values in parentheses are for connection C.



**NEW**

Note: The actual product is marked differently from the image shown here.

**RoHS Compliant**


## ■ Application Examples

- Communication equipment
- Industrial equipment
- Test & Measurement equipment
- Power circuit
- Security equipment


## ■ Package (Unit : mm, Average)

DIP 8-pin

PCB Terminals



Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

## ■ Model Number Legend

G3VM-□ □ □ □ □  
1 2 3 4 5

### 1. Load Voltage

- 6 : 60 V
- 10 : 100 V
- 20 : 200 V
- 40 : 400 V
- 60 : 600 V

### 2. Contact form

- 1 : 1a (SPST-NO)

### 3. Package

- C : DIP 8-pin with PCB terminals
- F : DIP 8-pin with surface-mounting terminals

### 4. Additional functions

- R: Low ON resistance

### 5. Other informations

When specifications overlap, serial code is added in the recorded order.

## ■ Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
				Model		Minimum package quantity	Model
				PCB Terminals	Surface-mounting Terminals		
DIP8	1a (SPST-NO)	60 V	5 A	G3VM-61CR1	G3VM-61FR1	50 pcs.	G3VM-61FR1(TR05)
		100 V	3 A	G3VM-101CR	G3VM-101FR		G3VM-101FR(TR05)
		200 V	1.5 A	G3VM-201CR	G3VM-201FR		G3VM-201FR(TR05)
		400 V	0.4 A	G3VM-401CR	G3VM-401FR		G3VM-401FR(TR05)
		600 V	0.6 A	G3VM-601CR	G3VM-601FR		G3VM-601FR(TR05)

\* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR05)" to the end of the model number.

■Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Item		Symbol	G3VM-61CR1 G3VM-61FR1	G3VM-101CR G3VM-101FR	G3VM-201CR G3VM-201FR	G3VM-401CR G3VM-401FR	G3VM-601CR G3VM-601FR	Unit	Measurement conditions	
Input	LED forward current	$I_F$			30				mA	
	Repetitive peak LED forward current	$I_{FP}$			1				A	
	LED forward current reduction rate	$\Delta I_F/\text{°C}$			-0.3				$\text{mA/}^\circ\text{C}$	
	LED reverse voltage	$V_R$			5				V	
	Connection temperature	$T_J$			125				$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	$V_{OFF}$	60	100	200	400	600	V		
	Continuous load current	$I_O$	5	3	1.5	0.4	0.6	A	Connection A: AC peak/DC Connection B and C: DC	
			5	3	1.5	0.4	0.6			
			10	6	3	0.8	1.2			
	ON current reduction rate	$\Delta I_O/\text{°C}$	Connection A	-50	-30	-15	-4	-6	$\text{mA/}^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
			Connection B	-50	-30	-15	-4	-6		
			Connection C	-100	-60	-30	-8	-12		
	Pulse ON current	$I_{OP}$	15	9	4.5	1.2	1.8	A	$t=100 \text{ ms, Duty}=1/10$	
	Connection temperature	$T_J$			125				$^\circ\text{C}$	
Dielectric strength between I/O (See note 1.)		$V_{I-O}$			2,500				Vrms	AC for 1 min
Ambient operating temperature		$T_a$	-40 to +85	-40 to +110		-40 to +85		$^\circ\text{C}$	With no icing or condensation	
Ambient storage temperature		$T_{STG}$			-55 to +125				$^\circ\text{C}$	
Soldering temperature		-			260				$^\circ\text{C}$	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## Connection Diagram

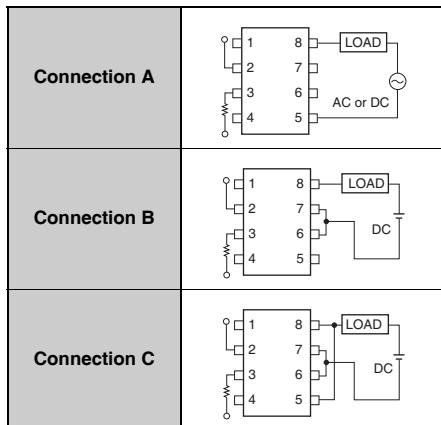

■Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Item		Symbol		G3VM-61CR1 G3VM-61FR1	G3VM-101CR G3VM-101FR	G3VM-201CR G3VM-201FR	G3VM-401CR G3VM-401FR	G3VM-601CR G3VM-601FR	Unit	Measurement conditions			
Input		VF	Minimum	1.5						V	I <sub>F</sub> =10 mA		
			Typical	1.64									
			Maximum	1.8									
		I <sub>R</sub>	Maximum	10						μA	V <sub>R</sub> =5 V		
		C <sub>T</sub>	Typical	70						pF	V=0, f=1MHz		
			Typical	0.28	0.3	0.3	0.2	0.23		mA	G3VM-61CR1/FR1 : I <sub>O</sub> =1 A G3VM-101CR/FR : I <sub>O</sub> =1 A G3VM-201CR/FR : I <sub>O</sub> =1 A G3VM-401CR/FR : I <sub>O</sub> =0.4 A G3VM-601CR/FR : I <sub>O</sub> =0.6 A		
Output		I <sub>FT</sub>	Typical	5	5	5	1	5			G3VM-61CR1/FR1 : I <sub>O</sub> =1 A G3VM-101CR/FR : I <sub>O</sub> =1 A G3VM-201CR/FR : I <sub>O</sub> =1 A G3VM-401CR/FR : I <sub>O</sub> =0.4 A G3VM-601CR/FR : I <sub>O</sub> =0.6 A		
			Maximum										
		I <sub>FC</sub>	Minimum	0.01						mA	G3VM-61CR1/FR1 : I <sub>OFF</sub> =1 μA G3VM-101CR/FR : I <sub>OFF</sub> =1 μA G3VM-201CR/FR : I <sub>OFF</sub> =1 μA G3VM-401CR/FR : I <sub>OFF</sub> =10 μA G3VM-601CR/FR : I <sub>OFF</sub> =1 μA		
			Typical	0.19	-	-	0.19	0.17					
		R <sub>ON</sub>	Typical	0.022	0.06	0.25	3	1.3		Ω	G3VM-61CR1/FR1 : I <sub>O</sub> =1 A, I <sub>F</sub> =5 mA, t < 1 s G3VM-101CR/FR : I <sub>O</sub> =1 A, I <sub>F</sub> =5 mA, t < 1 s G3VM-201CR/FR : I <sub>O</sub> =1 A, I <sub>F</sub> =5 mA, t < 1 s G3VM-401CR/FR : I <sub>O</sub> =0.4 A, I <sub>F</sub> =2 mA, t < 1 s G3VM-601CR/FR : I <sub>O</sub> =0.6 A, I <sub>F</sub> =5 mA, t < 1 s		
			Maximum	0.05	0.15	0.5	5	2					
			Maximum	0.025	0.075	0.25	2.5	1					
			Maximum	0.013	0.075	0.25	1.3	0.5					
Current leakage when the relay is open		I <sub>LEAK</sub>	Typical	0.01	0.02	0.1	0.001	0.05		μA	V <sub>OFF</sub> =Load Voltage Ratings		
			Maximum	10	1	1	1	10					
Capacitance between terminals		C <sub>OFF</sub>	Typical	850	720	400	410	4,300	pF	V=0, f=1 MHz			
Capacitance between I/O terminals		C <sub>i-o</sub>	Typical	0.8						pF	f=1 MHz, Vs=0 V		
Insulation resistance between I/O terminals		R <sub>i-o</sub>	Minimum	1,000						MΩ	Vi-o=500 VDC, RoH=60%		
			Typical	10 <sup>8</sup>									
Turn-ON time		t <sub>ON</sub>	Typical	2.5	1.5	0.25	0.22	0.8		ms	I <sub>F</sub> = 5 mA, R <sub>L</sub> = 200 Ω, V <sub>DD</sub> =20 V (See note 2.)		
			Maximum	5		1		3					
Turn-OFF time		t <sub>OFF</sub>	Typical	0.1		0.08		0.07					
			Maximum	1									

Note: 2. Turn-ON and Turn-OFF Times



## ■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61CR1 G3VM-61FR1	G3VM-101CR G3VM-101FR	G3VM-201CR G3VM-201FR	G3VM-401CR G3VM-401FR	G3VM-601CR G3VM-601FR	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	48	80	160	320	480	V
Operating LED forward current	I <sub>F</sub>	Typical	5	5	5	2	5	mA
		Maximum			25			
Continuous load current (AC peak/DC)	I <sub>O</sub>	Maximum	5	3	1.5	0.4	0.6	A
Ambient operating temperature	Ta	Minimum			-40			°C
		Maximum			85			

## ■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	7.0	
Clearance distances	7.0	mm
Internal insulation thickness	0.4	

## ■Engineering Data

### ● LED forward current vs. Ambient temperature

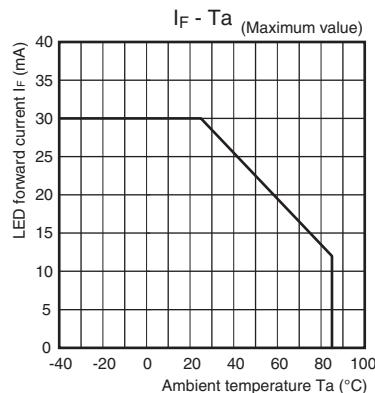


### ● LED forward current vs. LED forward voltage

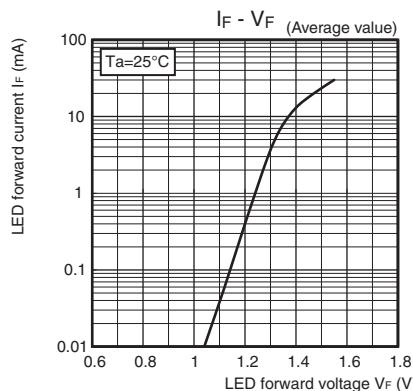


### ● On-state resistance vs. Ambient temperature

G3VM-61CR1/61FR1  
G3VM-101CR/101FR/201CR/201FR

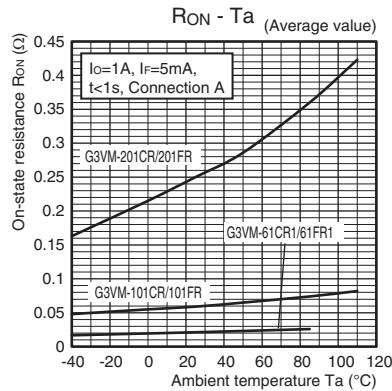


### ● Continuous load current vs. Ambient temperature

G3VM-61CR1/61FR1  
G3VM-101CR/101FR/201CR/201FR

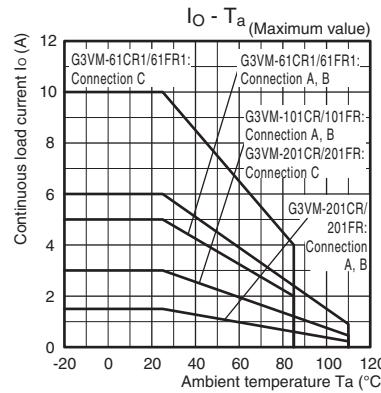

G3VM-401CR/401FR/601CR/601FR

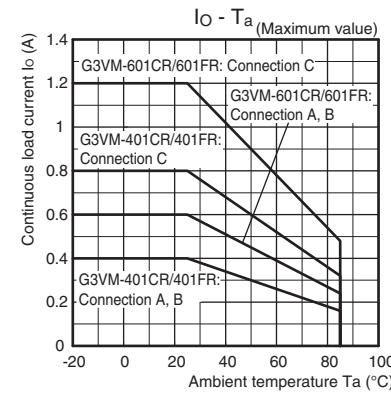


DIP


G3VM-□CR□/□FR□

### ● Continuous load current vs. On-state voltage

G3VM-61CR1/61FR1  
G3VM-101CR/101FR/201CR/201FR


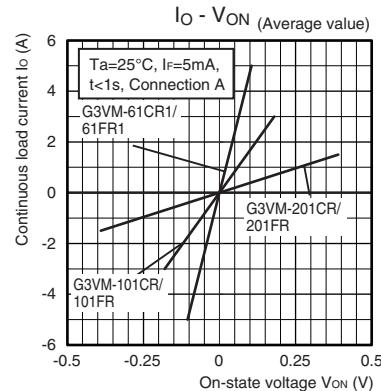


G3VM-401CR/401FR/601CR/601FR

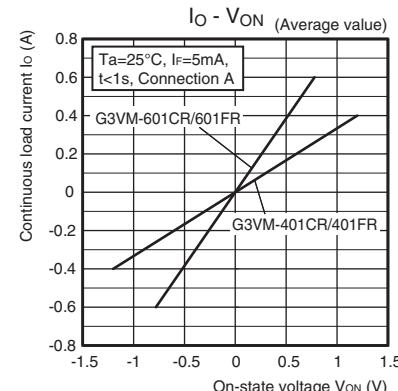

### ● Trigger LED forward current vs. Ambient temperature

G3VM-401CR/401FR/601CR/601FR

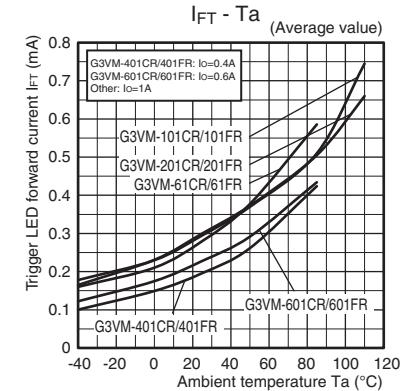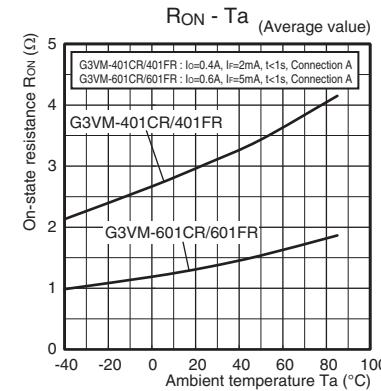



## ■Engineering Data

### ● Turn ON, Turn OFF time vs. LED forward current

G3VM-61CR1/61FR1

G3VM-101CR/101FR/201CR/201FR


G3VM-401CR/401FR/601CR/601FR

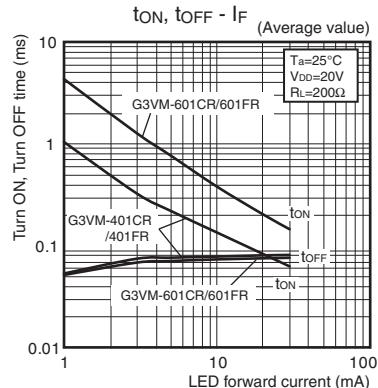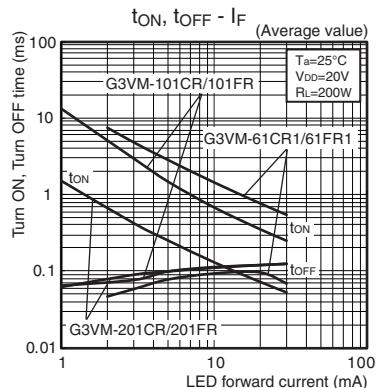


### ● Turn ON, Turn OFF time vs. Ambient temperature

G3VM-61CR1/61FR1


G3VM-101CR/101FR/201CR/201FR

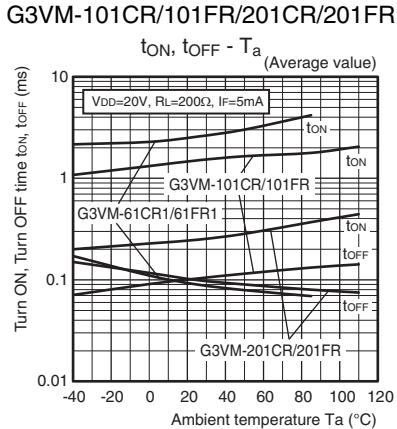

G3VM-401CR/401FR/601CR/601FR

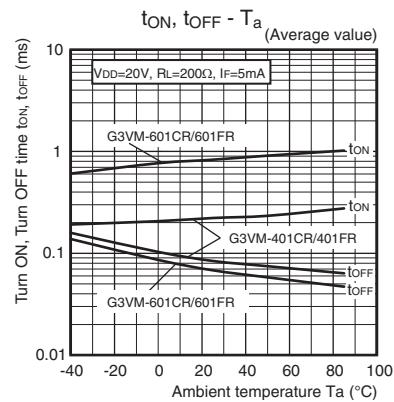

### ● Current leakage vs. Ambient temperature

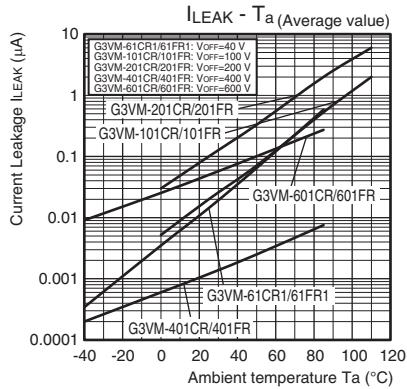


## ■Appearance / Terminal Arrangement / Internal Connections

### ●Appearance

DIP (Dual Inline Package)

DIP 8-pin

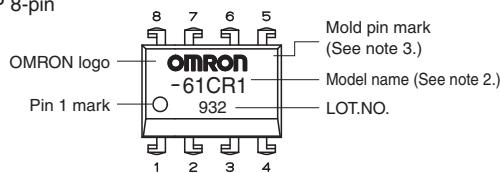


Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.

Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

### ●Terminal Arrangement/Internal Connections (Top View)




## ■Dimensions (Unit: mm)

DIP 8-pin




**PCB Terminals**

Weight: 0.54 g

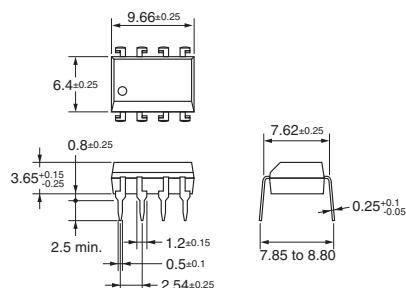


**Surface-mounting Terminals**

Weight: 0.54 g

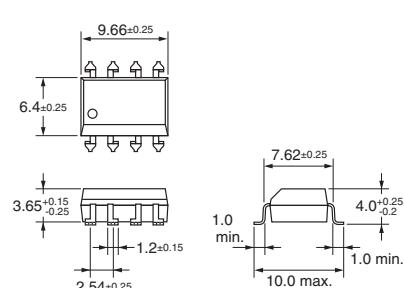


**PCB Dimensions (BOTTOM VIEW)**



**Actual Mounting Pad Dimensions**

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

## ■Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-61CR1 G3VM-61FR1	UL (recognized)	1a (SPST-NO)	E80555
G3VM-101CR G3VM-101FR			
G3VM-201CR G3VM-201FR			
G3VM-401CR G3VM-401FR			
G3VM-601CR G3VM-601FR			

## ■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**

**OMRON Corporation**

Electronic and Mechanical Components Company

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

Cat. No. K285-E1-02  
1017(0416)(O)